



专业手机维修工具
PROFESSIONAL TOOLS FOR TELECOMMUNICATION



搭建灵感世界

Build Afflatus to Keep Ur world



亨科（国际）电子科技有限公司
Hanker (International) Electronics Technology Co.,Ltd

亨科（国际）电子科技有限公司
Hanker (International) Electronics Technology Co.,Ltd



地址：广东省广州市荔湾区芳村茶滘路桃湾工业区新材料科技园A5幢三楼之二
Add : A5#,New Materials Science & Technology Park building,Taowan Industrial Area,Chajiao Road Liwan Distrct,Guangzhou,China
Tel:(+8620)-3102 0198 Fax:(+8620)-3102 0138 ext.8007

门市：广东省广州市西提二马路37号新文园国际电子数码城二楼2F-B055档
Add : Rm B055,2/F,Xin Wen Yuan International Electronic & Digital City,37#, Xidi Er Road,Guangzhou,China
Tel:(+8602)-8101 1898 Fax:(+8602)-8129 0899



公司简介

亨科（国际）电子科技有限公司于上世纪九十年代末创立于国际都市香港，公司从创立开始即以国际前沿的理念立足于行业潮流，产品畅销全球各地。为更好的拓展业务特别是亚太区庞大的市场需求，公司于2003年在广州成立运营中心，为市场提供专业的客服、物流及配送服务。

我们以电子通讯维修产品的研发、生产及销售为主营业务。经过多年的发展与创新，形成了以自有品牌“BAKU巴克”的电子工具系列产品，产品涵盖电子通讯维修工具、仪器及辅助材料等，并得到了广大客户的好评以及市场的高度认可。

展望未来，我们将在传统电子工具业务的基础上以前瞻性战略，组建创意营销团队，在产品中引入艺术与灵感元素，不断开发新的创意电子产品，以适应创新性社会对产品的需求。

秉承“感恩、友善、认真、细心”的企业文化，我们热诚期待为全球广大客户提供更新、更细、更快的专业产品、专业技术、专业服务。




Company Profile

Hanker (International)Electronics Technology Co.,Ltd. is established in Hongkong since 1999, and founded the Marketing Center in Guangzhou, to provide professional service, logistics and distribution services for Our customers.

Hanker (International)Electronics Technology Co.,Ltd. is a high technology business enterprise which gathers to maintain tools and instruments to produce,develop and sales.Our main products including the tools,instruments and software for telecommunication products repairing. Our products and the brand “BAKU” are popular in major domestic and international communications market,even the world.

In future,we will build the creative team,and make the element and inspiration of art in our products. Adhering to the enterprise culture of "Thanksgiving,Friendly,Ferious,Careful" we sincerely look forward to provide the professional products, professional technology, professional services for the global customers.

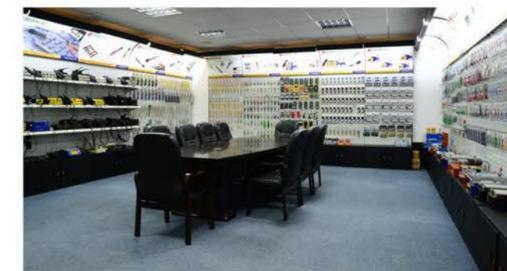

Certificate of Conformity



产品目录
CONTENT

1.	Precision Screwdriver 精密螺丝刀 套装螺丝刀	Page 1.
2.	Precision Tweezers 精密镊子	Page 11.
3.	Opening tools 拆机工具 屏幕工具	Page 15.
4.	Soldering Stations 拆焊台	Page 19.
5.	Rework Stations 热风枪	Page 21.
6.	Multi-Function Rework Stations 多功能组合型热风拆焊台	Page 25.
7.	Soldering Iron 电烙铁	Page 29.
8.	LCD Disassembly Machine 屏幕分离机	Page 30.
9.	DC digital Power supply 多功能电源	Page 31.
10.	Display Ultrasonic Cleaner 智能清洗器	Page 32.
11.	Auxiliary Material 辅料耗材 锡丝 焊油	Page 33.



灵感，为生活
增添色彩
Inspiration
Add color to life

BK-335



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	mm	mm	mm
	1.5	2.0	1.2	0.8	T2	25	96	12
	2.0	1.5	1.2	T3	25	96	12	
		2.0	1.5	T4	25	96	12	
				T5	25	96	12	
				T6	25	96	12	

颜色: 红色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Red
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use



BK-336



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	mm	mm	mm
	1.5	2.0	1.2	0.8	T2	25	100	12
	2.0	1.5	1.2	T3	25	100	12	
		2.0	1.5	T4	25	100	12	
				T5	25	100	12	
				T6	25	100	12	

颜色: 黑色 蓝色 红色 橙色 绿色 灰色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Black Blue Red Gray Orange Green
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use
 -Non-slip handle can play the best role
 -High accuracy of the size of screwdriver bit, also it is high abrasion resistance
 -High-tech three-dimensional of large area laser engraving.
 -The pole of the screwdriver is after two times plating treatment. Hardness coefficient significantly higher, reducing diameter from large variable bore arc, for safeguard



BK-338



规格 Specification

规格	1.5	2.0	1.2	2.5	0.8	T2	mm	mm	mm
	1.5	2.0	1.2	2.5	0.8	T2	25	98	12
	2.0	1.5	1.2	T3	25	98	12		
		1.8	1.5	T4	25	98	12		
		2.0		T5	25	98	12		
				T6	25	98	12		

颜色: 黑色 蓝色 红色 金色 绿色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Black Blue Red Gold Green
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use
 -bearing swivel cap
 -fine workmanship and beautiful design



BK-339



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	mm	mm	mm
	1.5	2.0	1.2	0.8	T2	25	100	12
	2.0	1.5	1.2	T3	25	100	12	
		2.0	1.5	T4	25	100	12	
				T5	25	100	12	
				T6	25	100	12	

颜色: 黑色 蓝色 红色 金色 绿色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Black Blue Red Gold Green
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use



BK-340



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	25	102	12
			1.5	1.2	T3	25	102	12
			2.0	1.5	T4	25	102	12
					T5	25	102	12
					T6	25	102	12

颜色: 黑色 蓝色 红色 金色 绿色 紫色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Black Blue Red Gold Green Purple
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use



BK-350



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	25	100	12
			1.5	1.2	T3	25	100	12
			2.0	1.5	T4	25	100	12
					T5	25	100	12
					T6	25	100	12

颜色: 黑色 蓝色 红色 金色 绿色 紫色 浅黄色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Black Blue Red Gold Green Purple Light yellow
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use



BK-360



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	25	98	12
			1.5	1.2	T3	25	98	12
			2.0	1.5	T4	25	98	12
					T5	25	98	12
					T6	25	98	12

颜色: 红色 黄色 蓝色 绿色 灰色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Red Yellow Blue Green Grey
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use



BK-362



规格 Specification

规格	1.5	2.0	1.2	0.8	T2	25	90	12
			1.5	1.2	T3	25	90	12
			2.0	1.5	T4	25	90	12
					T5	25	90	12
					T6	25	90	12

颜色: 黄色 蓝色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 Color: Yellow Blue
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use



BK-7270 Precision Screwdriver



规格 Specification

规格	规格	规格	规格	规格	规格
+	+	+	mm	mm	
1.5	0.8	T4	25	105	12
		T5	25	105	12
		T6	25	105	12

颜色: 金色, 蓝色, 红色, 紫色, 黑色, 绿色, 银色
 材料: S2工具钢+铝合金手柄
 扭转轴承更容易使用。
 -此螺丝刀最适合用于智能手机, 苹果电脑等产品修理。
 -采用独创的S2工具钢, 质量更高, 硬度更加强。
 -五角型螺丝刀专为苹果手机修理。
 Color: Gold, Blue, Red, Purple, Black, Green, Silver
 Material: S2 steel
 Bearing swivel cap is easy to use.
 -Screwdriver is best for repairing iphone set, Macbook Air, etc.
 -It is made of original S2 steel, high-quality, hardness about 58HR.
 -Screwdrivers pentagon is best for repairing iPhone mobile phone.



BK-7275 Precision Screwdriver



规格 Specification

规格	规格	规格	规格	规格	规格
+	+	+	mm	mm	
2.0	1.2	2.5	0.8	T2	25
	1.5	1.2	T4	25	105
	2.0		T5	25	105
			T6	25	105

颜色: 金色, 蓝色, 红色, 紫色, 黑色, 绿色, 银色
 材料: S2工具钢+铝合金手柄
 扭转轴承更容易使用。
 -此螺丝刀最适合用于智能手机, 苹果电脑等产品修理。
 -采用独创的S2工具钢, 质量更高, 硬度更加强。
 -五角型螺丝刀专为苹果手机修理。
 Color: Gold, Blue, Red, Purple, Black, Green, Silver
 Material: S2 steel
 Bearing swivel cap is easy to use.
 -Screwdriver is best for repairing iphone set, Macbook Air, etc.
 -It is made of original S2 steel, high-quality, hardness about 58HR.
 -Screwdrivers pentagon is best for repairing iPhone mobile phone.



BK-3310 Precision Screwdriver



规格 Specification

规格	规格	规格	规格	规格	规格
+	+	+	mm	mm	
2.0	1.2	2.5	0.8	T2	25
	1.5	1.2	T4	25	100
	2.0		T5	25	100
			T6	25	100

颜色: 黑色, 蓝色, 红色, 金色, 绿色, 紫色, 浅黄色
 材质: S2工具钢
 旋转手柄: 轴承旋转帽更方便使用
 -采用独创的S2工具钢, 质量更高, 硬度更加强。
 -五角型螺丝刀专为苹果手机修理。
 -扭转轴承更容易使用。
 Color: Black, Blue, Red, Gold, Green, Purple, Light yellow
 Material: S2 steel
 Rotatable handle: Bearing swivel cap easy to use
 -It is made of original S2 steel, high-quality, hardness about 58HR.
 -Screwdrivers pentagon is best for repairing iPhone mobile phone.
 -Bearing swivel cap is easy to use.



BK-3315 Precision Screwdriver



规格 Specification

规格	规格	规格	规格	规格	规格
+	+	+	mm	mm	
2.0	2.0	1.2	0.8	T2	25
		1.8		T3	25
				T4	25
				T5	25
				T6	25

颜色: 黄色, 金色, 红色, 蓝色, 绿色, 紫色
 材质: S2工具钢
 扭转轴承更容易使用。
 -该机构是由一个单件的铝制成, 并具有良好的滚花握把。
 -端盖旋转, 这样你就可以保持身体的稳定, 而旋转。
 Color: Yellow, Gold, Red, Blue, Green, Purple
 Material: S2 steel
 Bearing swivel cap is easy to use.
 -The body is made from a single piece of aluminum and has nice knurled grips.
 -The end-cap rotates so you can keep the body steady while rotating.
 -The tip is nicely machined and is magnetic so it holds the miniscule screws in place while inserting/removing them.



BK-3332 Precision Screwdriver Set



规格 Specification

规格	1.5	2.0	1.5	0.8	T2	mm	mm	mm
						25	95	6
	2.0	2.0			T3	25	95	6
					T4	25	95	6
					T5	25	95	6
					T6	25	95	6

颜色: 黄色 金色 红色 蓝色 绿色 灰色 银色
 材质: S2工具钢
 扭转轴承更容易使用。
 -此螺丝刀是由一个单件的铝制成, 并具有良好的滚花握把。
 -高品质的材料制造
 -旋转帽快速移动, 合金钢手柄, 防滑橡胶圈
 Color: Yellow Gold Red Blue Green Gray Silver
 Material: S2 steel
 Bearing swivel cap is easy to use.
 -The body is made from a single piece of aluminum and has nice knurled grips.
 -6pcs Manufactured from high quality bits material
 -Swivel Cap for quick move. Alloy Steel Handle, Non-slip Rubber



BK-3335 Precision Screwdriver Set



规格 Specification

规格	1.5	2.0	1.5	0.8	T2	mm	mm	mm
						25	95	6
	2.0	2.0			T3	25	95	6
					T4	25	95	6
					T5	25	95	6
					T6	25	95	6

颜色: 银灰色
 材质: S2工具钢
 扭转轴承更容易使用。
 -此螺丝刀是由一个单件的铝制成, 并具有良好的滚花握把。
 -6支高品质的材料制造
 -旋转帽快速移动, 合金钢手柄, 防滑橡胶圈
 Color: Silver
 Material: S2 steel
 Bearing swivel cap is easy to use.
 -The body is made from a single piece of aluminum and has nice knurled grips.
 -6pcs Manufactured from high quality bits material
 -Swivel Cap for quick move. Alloy Steel Handle, Non-slip Rubber



BK-5530 Precision Screwdriver Set



规格 Specification

规格	1.5	0.8	T4	mm	mm	mm
				25	95	5
			T5	25	95	5
			T6	25	95	5

颜色: 金色 红色 蓝色 绿色 银色
 材质: S2工具钢
 扭转轴承更容易使用。
 -采用独创的S2工具钢, 质量更高, 硬度更加强
 -五角型螺丝刀专为苹果手机修理
 -扭转轴承更容易使用
 Color: Gold Red Blue Green Silver
 Material: S2 steel
 Bearing swivel cap is easy to use.
 -It is made of original S2 steel, high-quality, hardness about 58HR.
 -Screwdrivers pentagon is best for repairing iPhone mobile phone.
 -Bearing swivel cap is easy to use.



BK-800-10 Precision Screwdriver Set



规格 Specification

规格	1.5	2.0	1.2	1.5	T2	mm	mm
						20	10
	2.0				T3	20	10
			2.0		T4	20	10
					T5	20	10
					T6	20	10

-Electric Screwdriver Tip
 -For all the kinds of 800 Electric Screwdriver
 -Made from original S2 Steel
 -Rigidity H.R.C 58-62



BK-3034 Precision Screwdriver Set



规格 Specification

规格	Specification	规格	Specification	规格	Specification	规格	Specification
3.0	M6	Y1	Ph0	2.3	T5	T8	H2.5
4.0	M8	Y2	Ph1		T6	T9	H3.0
5.0		Y3	Ph2		T7	T10	H4.0
6.0			Ph3			T15	H5.0
7.0						T20	H6.0
						T25	
						T30	
						T40	

-外盒采用ABS,TPE多物料一次注塑成型,双色设计具有防滑,实用,美观方便携带。
 -根据人体力学手形设计的特殊手柄,可根据不同空间需要进行拆装。
 -易于拆装的万向接杆,可在特殊的工作环境下使用。
 -规格齐全的精密起子,采用高材质铬钒钢(6150#)经过特殊高温处理(硬度HRC52°-56°)
 -The entire box uses a formation by ABS,TPE material injecting with double colors design. Its non-slip grip,practical convenience,also both portable and durable.
 -The handle shape is special ergonomic design,can disassemble as your working area's space.
 -The disassemble magnetic bar can be operated under special needs.
 -whole range of bits made by Cr-V steel(code 6150#),junder special heating treated. Its hardness reaches to HRC52°-56°.
 -To meet all areas of needs.



BK-3051 Precision Screwdriver Set



规格 Specification

规格	Specification	规格	Specification	规格	Specification	规格	Specification		
1.0	2.6	2.0	Ph000	Pz1	2.0	0.8	T3	H1.0	M2.5
1.5		3.0	Ph00	Pz2	2.3	1.2	T4	H1.5	M3.0
2.0			Ph0		2.6	1.5	T5	H2.0	M3.5
2.5			Ph1				T6	H2.5	M4.0
3.0			Ph2				T7	H3.0	M4.5
3.5							T8	H3.5	M5.0
4.0							T9	H4.0	M5.5
							T10		
							T15		
							T20		

-外盒采用ABS,TPE多物料一次注塑成型,双色设计具有防滑,实用,美观方便携带。
 -根据人体力学手形设计的特殊手柄,可根据不同空间需要进行拆装。
 -易于拆装的万向接杆,可在特殊的工作环境下使用。
 -规格齐全的精密起子,采用高材质铬钒钢(6150#)经过特殊高温处理(硬度HRC52°-56°)
 -The entire box uses a formation by ABS,TPE material injecting with double colors design. Its non-slip grip,practical convenience,also both portable and durable.
 -The handle shape is special ergonomic design,can disassemble as your working area's space.
 -The disassemble magnetic bar can be operated under special needs.
 -whole range of bits made by Cr-V steel(code 6150#),junder special heating treated. Its hardness reaches to HRC52°-56°.
 -To meet all areas of needs.



Precision Tweezers
精密镊子



i6 High-Precision Tweezers Set




- 防磁 • 防酸 • 无腐蚀 • 不锈钢 • 硬度45HRC
- 镊子尖部是特殊工艺处理,适用于工业,珠宝,钟表师,电子和医疗设备制造商。
- Anti Magnetic • Anti Acid • Non Corrosive • Stainless Steel • Hardness 45HRC
- These tweezers have a fine pointed tip and are perfect for handling small parts like SMD components.
- Many styles and materials are available for the special needs of industry, jewelers, watchmakers, electronic and medical device manufacturers.





i6 High-Precision Tweezers Set

A3 Swiss Style Precision Tweezers



- 防磁 • 防酸 • 无腐蚀 • 不锈钢
- 高级无划痕,防眩光表面处理
- 适用于磁性敏感的部件
- Anti Magnetic • Anti Acid • Non Corrosive • Stainless Steel
- Ideal for magnetism-sensitive components
- Superior no-scratch/anti-glare satin finish.

T7 Super precision tweezers set

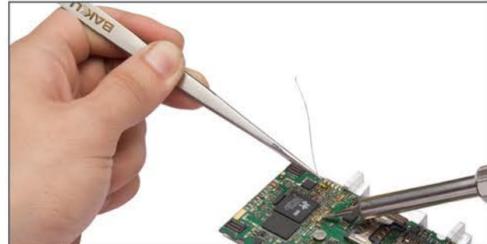


- 尖部镜面抛光工艺 • 贴片金属字 • 非磁性 • 抗酸
- 适用于细小的零件 • S2钢材精制而成
- S2 Stainless Steel • Non-Magnetic • Anti-Acid • mirror polished tips
- Ideal for magnetism-sensitive components




T7 Super precision tweezers set

V9 Non-Slip Tweezers Set



- 防滑握把 • 尖部镜面抛光工艺 • 抗摩擦防滑镊子
- 高级无划痕,防眩光表面处理
- 适用于钟表,手机的细小的零件。
- Non-Slip Grip • Mirror polished tips • Anti-Frictional Nonskid
- Ideal for magnetism-sensitive components
- Superior no-scratch/anti-glare satin finish.

A8 Set Ultra Rigidity Precision Tweezers




- 不锈钢 • 非磁性 • 抗酸 • 适用于磁性敏感的部件
- Stainless Steel • Non-Magnetic • Anti-Acid
- Ideal for magnetism-sensitive components



A8 Set Ultra Rigidity Precision Tweezers

SS-sa-18 Non-Slip Tweezers



- 尖部镜面抛光工艺 • 抗摩擦防滑镊子
- 高级无划痕,防眩光表面处理
- S2 Stainless Steel • Non-Magnetic • Anti-Acid • mirror polished tips
- Ideal for magnetism-sensitive components

A8 Set ESD-Safe Precision Tweezers



- 非腐蚀性-非眩光 • 不锈钢 • 硬度40HRC
- 防静电镊子由特殊防静电材料制成
- 适用于对静电敏感的元器件加工和安装。
- 有良好的柔韧性,并能有效地消除静电。
- They have good flexibility and can effectively eliminate electrostatic charge.
- Antistatic tweezers are made from special anti-static materials.
- ESD-Safe Precision • Non Corrosive-Non Glare • Stainless Steel • Hardness 40HRC



A8 Set ESD-Safe Precision Tweezers

34-sa-15 Straight Square Tipped Tweezers





- 防磁 • 防酸 • 无腐蚀 • 无眩光
- Anti Magnetic • Anti Acid • Non Corrosive-Non Glare

i164 Locking Diamond Tweezers



- 精密的镊子适用于宝石、钻石、能牢固的锁定物件。
- 防磁 •防酸 •无腐蚀 •无眩光
- Value-engineered for precision work. Stainless steel locking tweezers with fine or medium points.
- Precision Swiss made jewelry tweezers for holding diamonds, precious stones and small parts.
- Made of magnetizable stainless steel heat treated to approximately 45 Rockwell C and matte finished.

规格 Specification

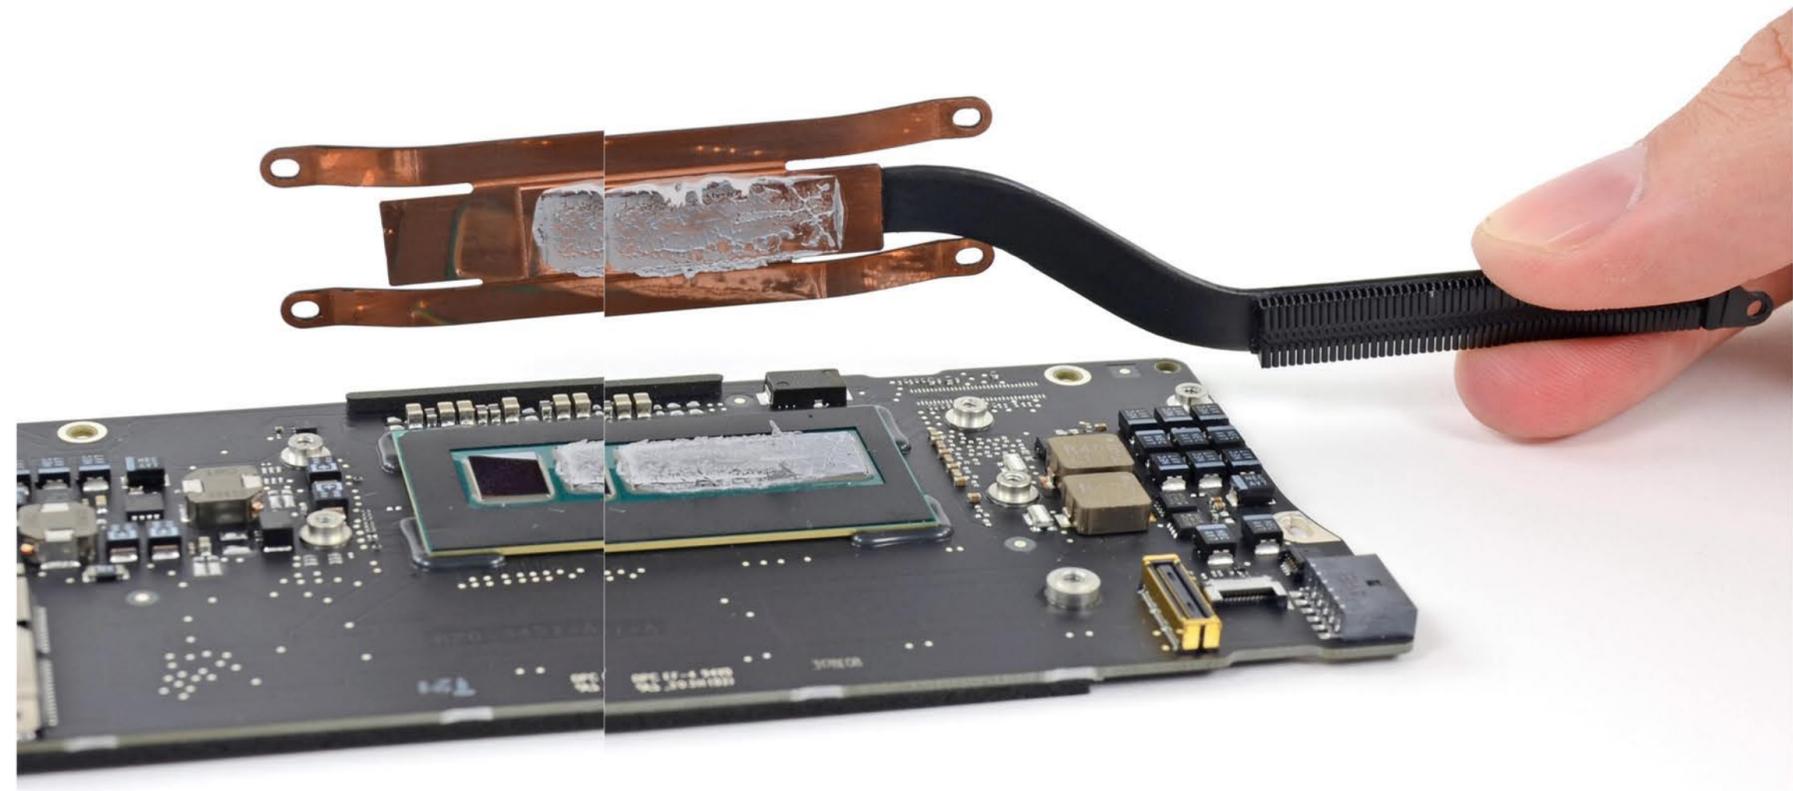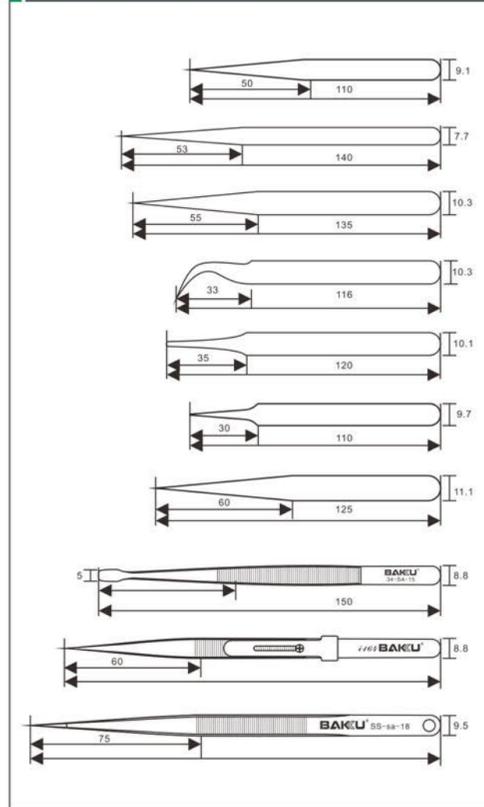

Opening tools
拆机工具

Metal Spudger



拥有一个舒适,易于握持手感,非常适合撬开了各种困难的组件,对于比较难撬的物件,这金属撬棒正是理想的作业工具。

While our first-choice tool for poking and prying is always our trusty plastic spudger, sometimes you need a little more power behind your pry. In those instances, this metal spudger is the ideal tool for the job.



BK-7278 Heavy-Duty Spudger



-适合开塑料如MP3播放器,手机,笔记本电脑和更多的电子产品。
-尼龙材质,不会损坏电子产品的表面。
-具有防静电保护,耐高温反应。
-可用于各种用途,如抗静电工具。
-Ideal for opening plastic cases such as MP3 players, cell phones, laptops and more.
-Also a great tool for popping out batteries.
-Nylon finish will not mar delicate surfaces.
-Can be used in ESD protected areas, Temperature resistant.
-A spudger is a tough antistatic tool that can be used for a variety of purposes when repairing electronic devices.



BK-7279 Opening Tool



这个坚固的工具灵活弹开小型电子产品外壳。
弹性钢片设有智能尖端的设计和有一个防滑的手柄。

-This tough tool nimbly pops open modern small electronics casings.
-Springy steel blade features a smart tip design and a handle with a great no-slip grip.



BK-212 Opening Picks set of 12



-6个大和6个小,超薄开屏工具。
-可用于撬开边缘,并不会损坏外壳物件。
-这些开屏工具是特别适合撬开iPad和其他智能手机。

-12 very thin opening picks.
-Can be used for prying, sliding, separating, and air guitaring.
-These picks are especially useful for prying open iPads and other glue-laden devices.



BK-108 Stainless steel inclined pliers



-维修工具高强度不锈钢斜嘴剪钳。
-由含锌量低的不锈钢制成,抗氧化,金属强度高,适用于剪断合金金属。

-Repair tools high strength stainless steel pliers oblique mouth.
-By the low amount of zinc cast stainless steel, anti-oxidation, high strength metal, suitable for cut alloy metals.



BK-021 Cutting Pliers



-电角线钳,由高强度钢制成,舒适的防滑手柄。
-尺寸:5" 弹簧加载,方便使用。

021 Diagonal Pliers
031 Long Nose Plier
055 bent nose plier 45 deg
-Used for grasping or bending small objects and for cutting.
-Bent nose helps reach objects in cramped space
-Slip-resistant bi-material handle for a comfortable grip
071 5inch Needle Nosed Plier



BK-687 PCB Holder



-有三个可移动的卡嘴,选择电路板上的最佳卡位。
-调整上下可移动的卡嘴,得到最佳的宽度和力度。
-可以用螺丝固定在工作台。

-The three movable card tip can be selected the best position on the circuit board card.
-It can be adjusted up and down movement of the mouth so that get the best of the width and slength.
-It can use the screw to fix on the table.



BK-210 Magnetizer/demagnetizers Tools



-磁化你的螺丝刀,让他们粘住小螺丝。
-消除你的螺丝刀安全工作对敏感电子产品。
-可反复交替磁化的许多倍。

-Magnetize your screwdrivers to allow them to grab small screws.
-Demagnetize your screwdrivers to safely work on sensitive electronics.
-Alternate magnetizations as many times as your heart desires!



BK-106 Suction Pump Tin



-吸锡泵的作用是把多余的锡除去。
-使用与任何除锡需要,设计精巧,吸锡功能超强,效率级高。
-采用独特碎锡方法,容易清除吸锡嘴,不会造成堵塞。

-The function of suction pump tin is to remove the extra tin.
-Designs Dexterously,absorptivity tin,the efficiency is extremely high.
-Uses the unique broken tin method, easy to eliminate, dose not clogging.




BK-120 Solder Assist Tools Set



-增强辅助维修工具是在焊接过程中的维修,组装和拆卸打开或拆卸电子元件,设置了方便的辅助工具。
-增强辅助维修工具包括6个双面仪器:杆,刷子,镊子,叉,刀片,刮刀和铰刀。

-Solder assist repair tools is a convenient auxiliary tools set for repair, assembly and disassembly operations in the process of soldering or desoldering the electronic components.
-solder assist repair tools consists of 6 double-sided instruments: lever, hook, brush, fork shaft, needle, chip holder, knife, scraper and reamer.



BK-939 Vacuum Sucking Pen



吸笔内配置了三个吸盘,分别力大,中,小三个型号,吸力能力分别为:
(1)大的能吸起约140g
(2)中的能吸起约56g
(3)小的能吸起约6g

Suction headers are provided with this suction pencil, large size, medium size and small size respectively for:
(1)large size for 140g
(2)medium size for 56g
(3)small size for 6g



BK-109 Cutting Pliers



-电角线钳,由高强度钢制成。
-尺寸:5" 弹簧加载,方便使用。
-舒适的防滑手柄。

-Full Flush cut,45°Angle use in tight spaces
-Spring Loaded for easy use
-Size : 5"
-Comfortable Non-slip handle



ø58mm Heavy-Duty Suction Cups



获取重型玻璃重抓地力。
-大型玻璃玻璃很少设有手柄，使用这些吸盘安全地拉起并从LCD屏幕移除玻璃。
-理想的获得进入iMac电脑和玻璃护套笔记本电脑显示器。
-适用于手机屏幕，iPad和其它平板电脑。
-Get a heavy-duty grip on heavy-duty glass.
-Large glass panels rarely come with handles—use these suction cups to safely lift and remove glass from LCD screens.
-Ideal for gaining entry into iMacs and glass-sheathed laptop displays.
-suction cup for removing phone and tablet glass panels.



BK-7289 Opening tools Set



-适用于苹果手机
-用更简单的方法拆除你的手机
-舒适的手柄防静电防滑
-Fit for Apple iPhone Mobile
-The easier way to dismantle your phone
-Comfortable handle
-Anti-Static,Anti-skidding

- A: 0.8x40mm 1.3x40mm
- B: 0.8x40mm 1.0x40mm

Package Include:
2 x Hair Screw Drivers, 1 x suction vacuum opener, 1 x Tweezer



BK-7015 Tools kit



- For Iphone, Blackberry, HTC and Nokia N78 combination set tools.
1. PCB holder for holding PCB board. Size:220*155*2mm
 2. The screw holes distribution specially are using to put the screws for Iphone 4S with the size of 1.2mm and 0.8mm pentagon screwdrivers.
 3. Opening tools for removing the antenna and opening the phone housing. Size:120*7.5*4mm
 4. Portable Clip PLCC IC Extractor Extraction Tool for taking out the cell phone cameras.
 5. Screwdrivers with the size of T5, T6 for blackberry.
 6. Solder Assit Tools.
 7. Opening tools for opening the model of NK78 mobile phone housing.
 8. Soldering Paste for welding.
 9. Shaving knife using for soldering.
 10. Suction Cup using to take out the phone LCD.
 11. Opening tools that assist to opening the phone housing.
 12. Desoldering wick saturated with wash-free RMA flux. Length:1.5m Width:1.5mm
 13. BGA Plate with high temperature,acid-resistance, Corrosion - resistance,permeability.

- 适用于苹果,黑莓,诺基亚三星等众多智能手机维修。
1. PCB板电路板固定支架。尺寸：220*155*2毫米。
 2. 专门为iphone4s使用的螺丝孔分布板，可用1.2mm和0.8mm五角螺丝刀。
 3. 开手机工具，可取出接收天线和打开手机外壳。尺寸：120*7.5*4mm
 4. 手机摄像头镜头。专门拆卸手机摄像头。
 5. T5/T6螺丝刀专用于黑莓手机。
 6. 焊料辅助工具。
 7. 开NK78手机外壳的开手机工具。
 8. 焊接锡膏。
 9. 剃刀
 10. 使用真空吸盘取出手机液晶显示屏。
 11. 拆机片，可协助打开手机外壳。
 12. 吸锡线 长度：1.5m 宽度：1.5mm
 13. BGA板，具有耐高温，耐酸碱，耐腐蚀，耐渗透性等特性。



BK-7285 Opening tools Set



作用首先使用BK-211螺丝刀拆除手机SIM卡再使用BK-211十字头拆开黑色塑料盖的螺丝,再用拆机工具撬开外壳,用镊子拆除手机天线和电池连接器。
First,Use the BK-211 thimble to removed the sim card adapter, use the BK-212 opening tool to open the black plastic cover, then use the BK-211 screwdriver to open the steel cover,remove the antenna and use the tweezor to remove the battery connector.




BK-7290 Opening tools Set



-Opening tools for blackberry and mobile phone repair tools
-hand tool set,Nice to use and simple to deal with
-适用于黑莓手机和智能手机拆机维修工具
-精密的拆机手动套装工具。

- A: T2x40mm T2x40mm
- B: T5x40mm T6x40mm
- C: T2x40mm T4x40mm
- D: 1.7x40mm T6x40mm
- E: 1.7x40mm 0.8x40mm

Package Include:
2 x Hair Screw Drivers, 1 x Opening Tools, 1 x Tweezers

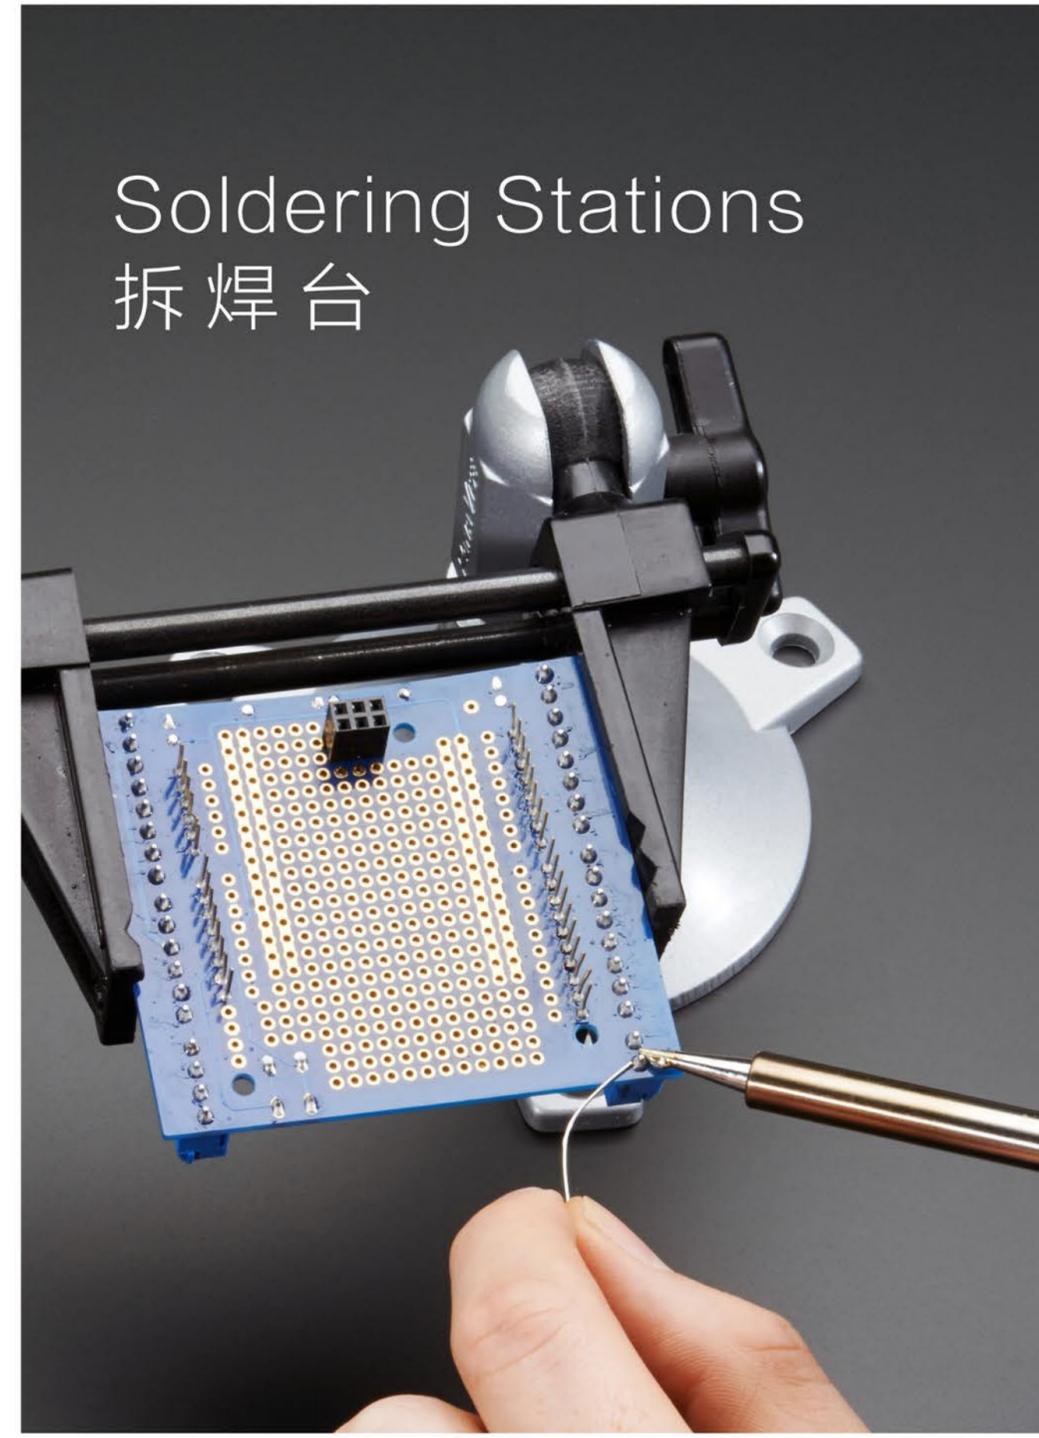

Soldering Stations
拆焊台

BK-936A Soldering Stations



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED指示灯	Type	LED Indicator Light
功率消耗	60W	Power Consumption	60W
输出电压	交流电24伏特 (V)	output Voltage	AC 24V
温度调节范围	200°C~480°C	Temperature Range	200°C~480°C

BK-936D+ Soldering Stations



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LCD数码显示	Type	LED Digital Light
功率消耗	70W	Power Consumption	70W
输出电压	交流电24伏特 (V)	output Voltage	AC 24V
温度调节范围	200°C~480°C	Temperature Range	200°C~480°C

BK-936N Soldering Stations



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED指示灯	Type	LED Indicator Light
功率消耗	50W	Power Consumption	50W
输出电压	交流电24伏特 (V)	output Voltage	AC 24V
温度调节范围	200°C~480°C	Temperature Range	200°C~480°C

BK-936E Soldering Stations






符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED指示灯	Type	LED Indicator Light
功率消耗	50W	Power Consumption	50W
输出电压	交流电24伏特 (V)	output Voltage	AC 24V
温度调节范围	200°C~480°C	Temperature Range	200°C~480°C

Solder Iron Tips



Copper make more efficient heat transfer
Electroplating layer, anti-corrosion treatment, live longer
Wipe-tin, effective in preventing oxidation
-铜基结构令传热效率更高, 使工作得心应手
-电镀层密实, 经过抗腐蚀处理, 寿命更长, 经久耐用
-镀锡的焊咀能更有效的令焊锡均匀, 并有效防止氧化

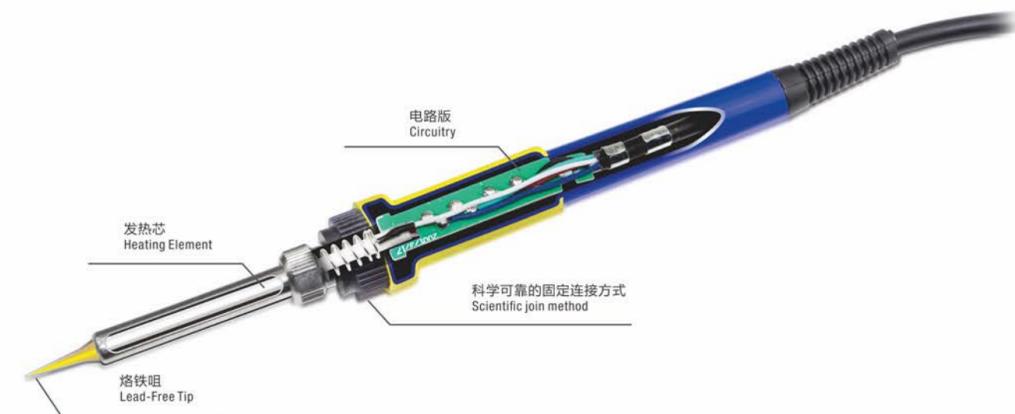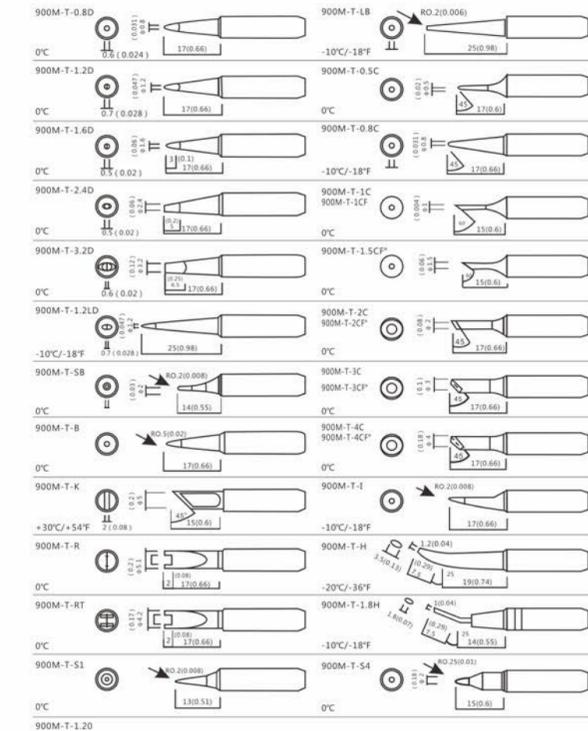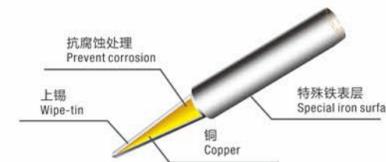



Rework Stations
热风枪

BK-600A Rework Stations



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED指示灯	Type	LED indicator light
功率消耗	700W	Power Consumption	700W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-600D Rework Stations



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED数码显示	Type	LED digital display
功率消耗	750W	Power Consumption	750W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-602A Rework Station



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED指示灯	Type	LED indicator light
功率消耗	1400W	Power Consumption	1400W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-602D Rework Station



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED数码显示	Type	LED digital display
功率消耗	1400W	Power Consumption	1400W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-858 Rework Stations



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED指示灯	Type	LED indicator light
功率消耗	700W	Power Consumption	700W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-858L Rework Stations



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED数码显示	Type	LED digital display
功率消耗	750W	Power Consumption	750W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-851A+ Rework Stations



符合CE认证标准 CE Certification

规格 Specification		恒温 Constant Temperature	
类型	LED指示灯	Type	LED indicator light
功率消耗	270W	Power Consumption	270W
气流量	0.3-24 L/min(max)	Blower fan	0.3-24 L/min(max)
气泵形式	膜片式	Air pump type	Diaphragm
气泵功率	45 W	Pump power	45 W
温度调节范围	150-500°C	Temperature range	150-500°C
手柄组件长度	120cm	Handle length	120cm

BK-851A Rework Stations



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED指示灯	Type	LED indicator light
功率消耗	270W	Power Consumption	270W
气流量	0.3-24 L/min(max)	Blower fan	0.3-24 L/min(max)
气泵形式	膜片式	Air pump type	Diaphragm
气泵功率	45 W	Pump power	45 W
温度调节范围	150-500°C	Temperature range	150-500°C
手柄组件长度	120cm	Handle length	120cm

BK-857 Rework Station



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED指示灯	Type	LED indicator light
功率消耗	1400W	Power Consumption	1400W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-857D Rework Station



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED数码显示	Type	LED digital display
功率消耗	1400W	Power Consumption	1400W
气流量	120L/M(max)	Blower fan	Brushless fan
气泵气流类型	无刷风机柔和旋转风	Amount of wind	120 L/m (maximum)
温度调节范围	100-450°C	Temperature range	100-450°C
手柄组件长度	120cm	Handle length	120cm

BK-852L Rework Station



符合CE认证标准 CE Certification

规格 Specification		Type	
类型	LED数码显示	Type	LED digital display
功率消耗	270W	Power Consumption	270W
气流量	0.3-24 L/min(max)	Blower fan	0.3-24 L/min(max)
气泵形式	膜片式	Air pump type	Diaphragm
气泵功率	45 W	Pump power	45 W
温度调节范围	150-500°C	Temperature range	150-500°C
手柄组件长度	120cm	Handle length	120cm

Multi-Function Rework Stations 多功能型热风拆焊台



BK-601A Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED指示灯	Type	LED indicator light
功率消耗	750W	Power Consumption	750W
气流量	120L/M(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-601D Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED数码显示	Type	LED digital display
功率消耗	750W	Power Consumption	750W
气流量	120L/Min(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-603A Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED指示灯	Type	LED indicator light
功率消耗	800W	Power Consumption	800W
气流量	120L/M(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-603D Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification		规格 Specification	
类型	LED数码显示	Type	LED digital display
功率消耗	800W	Power Consumption	800W
气流量	120L/Min(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-701A Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification			
类型	LED指示灯	Type	LED indicator light
功率消耗	320W	Power Consumption	320W
气流量	0.3-24 L/min(max)	Blower fan	0.3-24 L/min(max)
气泵形式	膜片式	Air pump type	Diaphragm
气泵功率	45 W	Pump power	45 W
温度调节范围	150-500°C	Temperature range	150-500°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-702L Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification			
类型	双LED数码显示	Type	LED digital display
功率消耗	330W	Power Consumption	330W
气流量	0.3-24 L/min(max)	Blower fan	0.3-24 L/min(max)
气泵形式	膜片式	Air pump type	Diaphragm
气泵功率	45 W	Pump power	45 W
温度调节范围	150-500°C	Temperature range	150-500°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-701L Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification			
类型	LED数码显示	Type	LED digital display
功率消耗	330W	Power Consumption	330W
气流量	0.3-24 L/min(max)	Blower fan	0.3-24 L/min(max)
气泵形式	膜片式	Air pump type	Diaphragm
气泵功率	45 W	Pump power	45 W
温度调节范围	150-500°C	Temperature range	150-500°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-878 Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification			
类型	LED指示灯	Type	LED indicator light
功率消耗	750W	Power Consumption	750W
气流量	120L/M(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-878L Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification			
类型	LED数码显示	Type	LED digital display
功率消耗	750W	Power Consumption	750W
气流量	120L/Min(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-878L² Multi-Function Rework Stations



符合CE认证标准 CE Certification

规格 Specification			
类型	双LED数码显示	Type	LED digital display
功率消耗	750W	Power Consumption	750W
气流量	120L/M(max)	Amount of wind	120L/Min(max)
气泵气流类型	无刷风机柔和旋转风	Blower fan	brushless fan
温度调节范围	100-450°C	Temperature range	100-450°C
烙铁温度	200-480°C	Soldering Iron Temp	200-480°C
手柄组件长度	120cm	Handle length	120cm

BK-452 Soldering Iron



工作电压: Ac 110/220V - AC220/240V
 功率: 20W,30W,40W,60W
 Operating Voltage: Ac 110/220V - AC220/240V
 Power Consumption: 20W,30W,40W,60W

进口的加热器快速热身和稳定的温度。
 防滑舒适的手柄设计适合长时间使用。
 防静电烙铁手柄设计来保护敏感组件。

Imported Heater for Quick Warm-up and Stabilized Temperature
 Agile and Light Handle Suitable for Comfortable Long Time Use
 ESD Design of Soldering Iron Handle to Protect Sensitive Components

BK-458 Electric Soldering Iron



工作电压: Ac 110/220V - AC220/240V
 功率: 20W,30W,40W,60W
 Operating Voltage: Ac 110/220V - AC220/240V
 Power Consumption: 20W,30W,40W,60W

进口的加热器快速热身和稳定的温度。
 防滑舒适的手柄设计适合长时间使用。
 防静电烙铁手柄设计来保护敏感组件。

- Easy to hold and provides excellent heat insulation
 - Higher insulation resistance than nichrome heating elements
 - Everpoint tip achieves excellent corrosion resistance thanks to our unique manufacturing method. (Several 10... time the life of copper tips)

BK-456 industrial gas mini Soldering Iron



工作电压: Ac 110/220V - AC220/240V
 功率: 20W,30W,40W,60W
 温度范围: 220-450°C
 通过在手柄上转动杆控制温度
 绝缘电阻: 高达100MΩ

Operating Voltage: Ac 110/220V - AC220/240V
 Power Consumption: 20W,30W,40W,60W
 Temperature range: 220-450°C
 Controlling temperature by turning rod on the handle
 Insulation resistor: up to 100MΩ

Handle with operating temperature thermostat knob hole, clockwise from left to right to change the electric iron soldering iron to heat up when the indicator light, temperature state indicator is flashing slightly, and soon will be automatically extinguished

BK-459 Electric Soldering Iron



工作电压: Ac 110/220V - AC220/240V
 功率: 20W,30W,40W,60W
 Operating Voltage: Ac 110/220V - AC220/240V
 Power Consumption: 20W,30W,40W,60W

- 高绝缘, 高耐压。
 - 温度恢复功能好, 烙铁头寿命长。
 - 坚固耐用, 可以在生产线上使用很长的时间, 高效率的使用。
 - 比正常的烙铁节省超过50%的电量。

- High insulation, high withstand voltage
 - Temperature recovery function good, soldering tip has FNC long life time
 - Durable, can use on production line for long time, and high efficiency.
 - Save energy more than 50% than normal soldering iron.

BK-946A LCD Disassembly Machine



规格 Specification

材质	不锈钢	Material	Stainless steel
工作电压	220/110V AC	Operating Voltage	220/110V AC
最大加热功率	800W	Maximum heating power	800W
温度范围	50°C-350°C	Temperature range	50°C-350°C
控温精度	± 1°C	Temperature accuracy	± 1°C
尺寸(mm)	196x 146X 200	Size (mm)	196x 146X 200

BK-948A LCD Disassembly Machine



规格 Specification

材质	亚克力板	Material	acrylic sheets
工作电压	220/110V AC	Operating Voltage	220/110V AC
最大加热功率	500W	Maximum heating power	500W
温度范围	50°C-400°C	Temperature range	50°C-400°C
控温精度	± 1°C	Temperature accuracy	± 1°C
尺寸(mm)	320x 160X 190	Size (mm)	320x 160X 190

BK-948B LCD Disassembly Machine



规格 Specification

材质	不锈钢	Material	Stainless steel
工作电压	220/110V AC	Operating Voltage	220/110V AC
最大加热功率	500W	Maximum heating power	500W
温度范围	50°C-400°C	Temperature range	50°C-400°C
控温精度	± 1°C	Temperature accuracy	± 1°C
尺寸(mm)	320x 160X 190	Size (mm)	320x 160X 190

-手机触摸屏的拆除
 -SMD元件的焊接作业
 -其它需加热的作业

-Remove the touch screen of mobile phone and tablet device.
 -SMD components welding operation
 -Other jobs to be heated.

控温加热板采用优质铝合金材质,加厚发热铝板,使温度更稳定,均匀,微处理芯片控温准确,LED显示温度,本产品使用方便,适用范围广,是理想的加热工具。

This intelligent heater plate made of high quality aluminum alloy material, More thick aluminum heat, the temperature is more stable and uniform. Micro-processing chip accurate temperature control, LED temperature display. This product is easy to use for a wide range and is ideal for heating tools.

BK-1501D USB DC digital Power supply



规格 Specification			
输入电压	220v/50Hz	Input Voltage	220v/50Hz
输出功率	400 - 500W	Output Power	400 - 500W
输出电流	0.6A - 2.1A	Output Current	0.6A - 2.1A
纹波噪声	< 1mArms	Ripple and noise	< 1mArms
工作条件	-10°C~ 40°C	Work conditions	-10°C~ 40°C
稳定电压	<0.01% ±2MV	Voltage stability	<0.01% ±2MV
在稳定负荷变化	<0.2% ±3MA	Load changes in stability	<0.2% ±3MA
恢复时间	<100 Uus	Recovery time	<100 Uus
温度系数	< 300 ppm /°C	Temperature coefficient	< 300 ppm /°C
输出电压	0-15v,1.5v,3.6v,4.8v,6v,7.2v	Output Voltage	0-15v,1.5v,3.6v,4.8v,6v,7.2v

BK-1501T+ Regulated DC Digital Power supply



规格 Specification			
输入电压	220v/50Hz	Input Voltage	220v/50Hz
输出功率	400 - 500W	Output Power	400 - 500W
输出电流	0.6A - 2.1A	Output Current	0.6A - 2.1A
纹波噪声	< 1mArms	Ripple and noise	< 1mArms
工作条件	-10°C~ 40°C	Work conditions	-10°C~ 40°C
稳定电压	<0.01% ±2MV	Voltage stability	<0.01% ±2MV
在稳定负荷变化	<0.2% ±3MA	Load changes in stability	<0.2% ±3MA
恢复时间	<100 Uus	Recovery time	<100 Uus
温度系数	< 300 ppm /°C	Temperature coefficient	< 300 ppm /°C
输出电压	0-15v,1.5v,3.6v,4.8v,6v,7.2v	Output Voltage	0-15v,1.5v,3.6v,4.8v,6v,7.2v

BK-1502TA Switching DC Digital Power Supply



规格 Specification			
输入电压	220v/50Hz	Input Voltage	220v/50Hz
输出功率	400 - 500W	Output Power	400 - 500W
输出电流	0.6A - 2.1A	Output Current	0.6A - 2.1A
纹波噪声	< 1mArms	Ripple and noise	< 1mArms
工作条件	-10°C~ 40°C	Work conditions	-10°C~ 40°C
稳定电压	<0.01% ±2MV	Voltage stability	<0.01% ±2MV
在稳定负荷变化	<0.2% ±3MA	Load changes in stability	<0.2% ±3MA
恢复时间	<100 Uus	Recovery time	<100 Uus
温度系数	< 300 ppm /°C	Temperature coefficient	< 300 ppm /°C
输出电压	0-15v,1.5v,3.6v,4.8v,6v,7.2v	Output Voltage	0-15v,1.5v,3.6v,4.8v,6v,7.2v

作用：
-通信维修专用电源，是专为手机及各类通信仪器设备维修所设计的，它采用最先进的短路保护恢复电路。
-保护速度快，并有声光报警提示，待排除短路后能在1秒内自动恢复输出。
-电压测量接口，能代替精密数字电压表测量直流电压。
-射频信号检测功能，适合通信仪器设备生产维修之用。

Function:
-Maintenance of communications-specific power, is designed for mobile phones and other communications equipment designed for maintenance, it uses the most advanced short-circuit protection circuit to resume.
-The Protection of the rapid rate of, And a sound and light alarm, after treating the unshorting, To be ruled out after in 1 second automatically resume output.
-Voltage measurement interface, Can be replaced by precise digital voltmeter measurements voltages DC.
-Radio-frequency signal detection, Suitable for of communication equipment maintenance.



BK-9050 Digital Display Ultrasonic Cleaner



符合CE认证标准 CE Certification

规格 Specification			
类别	LCD 显示屏	Type	LCD Display
电源	220V-50HZ	Voltage (V)	220V-50HZ
功率	35W/50W	Power (W)	35W/50W
工作频率	40khz	Working frequency	40khz
容量	0.6 升	Tank Capacity	0.6L
颜色	白色、绿色	Color	white / green
材质	环保塑胶	Material	Plastic

BK-3550 Stainless Steel Digital Display Ultrasonic Cleaner



符合CE认证标准 CE Certification

规格 Specification			
类别	LCD 显示屏	Type	LCD Display
电源	220V-50HZ	Voltage (V)	220V-50HZ
功率	35W/50W	Power (W)	35W/50W
工作频率	40khz	Working frequency	40khz
容量	0.8 升	Tank Capacity	0.8L
颜色	拉丝银	Color	Brushed silver
材质	拉丝纹理不锈钢	Material	Stainless Steel

BK-9030 Digital Display Ultrasonic Cleaner



符合CE认证标准 CE Certification

规格 Specification			
类别	LED指示灯	Type	LED indicator light
电源	220V-50HZ	Voltage (V)	220V-50HZ
功率	35W	Power (W)	35W
工作频率	40khz	Working frequency	40khz
容量	0.6 升	Tank Capacity	0.6L
颜色	白色、绿色	Color	white / green
材质	环保塑胶	Material	Plastic

BK-3050 Stainless Steel Digital Display Ultrasonic Cleaner



符合CE认证标准 CE Certification

规格 Specification			
类别	LCD 显示屏	Type	LCD Display
电源	220V-50HZ	Voltage (V)	220V-50HZ
功率	35W/50W	Power (W)	35W/50W
工作频率	40khz	Working frequency	40khz
容量	0.8 升	Tank Capacity	0.8L
颜色	镜面反光不锈钢	Color	Mirror stainless steel
材质	镜面反光不锈钢	Material	Stainless Steel

Auxiliary Material 辅料耗材



BK-126 绿油 UV Curable Solder Mask



- 快速固化,广泛应用于电子通讯行业的电路板。
- 绝缘印刷电路板短路反对和电弧。
- 免受腐蚀和潮湿PCB走线,更好的保护线路板上的元件。
- 也可用于焊接和返修后的修复电路板。
- UV光固化阻焊油墨,过网性能,固化速度快,附着力强,耐化学性和绝缘性,单面电路板的焊点与。
- Quick curing
- Insulates printed circuit board against shorting and arcing
- Protects PCB traces from corrosion and moisture
- Also used for repairing PCB after soldering and reworking
- UV light-cured solder resist ink, over the net performance, fast curing, strong adhesion, chemical resistance and insulation, single-sided circuit board solder with.

Solidified temperature : 110-120°Cx10-15min
Heat-patience : 260±50°C
Smallness(μm) : ≤10
Viscosity(cenitoise 25°C)
Hardncss(H) : ≥6 Attach : 100/100
Net: 8g
Package : 1 x 12pcs

BK-426 导电银浆 Conductive Silver paint



- 对电子元件焊接后起绝缘及保护作用,并适用于修复计算机手机pcb电路板阻焊层剥落或局部受损。
- BK-426银浆用可以用非常细的银粒子控制的导电性能和低温固化热塑性树脂精制而成,完全适应了丝网印刷产品。
- 典型用途:薄膜开关,印刷触点,射频干扰屏蔽,加热元件,柔性电路,电镀多层电路板。
- 可用于薄膜开关,柔性印刷电路板。因为它是低温固化,在PC,PET,PVC,PU等薄膜可以使用的。
- Typical use: membrane switch, print contacts, radio frequency interference shielding, heating elements, flexible circuit, electroplating, multi-layer circuit boards.
- Can be used for membrane switch, flexible printed circuits. Because it is low-temperature curing, in PC, PET, PVC, PU and other films can be used on only.

Side resistance: < 0.1 ohms / sq @ 1 mil
157-200 mesh / inch monofilament polyester mesh
165-250 mesh / inch stainless steel wire mesh
Thick: ≥ 12.5 μm
Package : 1 x 12pcs

BK-227 免清洗焊膏 Lead Free Soldering Flux



- 帮助修复电路板和保护电子元件。修理手机主板一个必要的材料。
- 巴库焊料膏是高粘度的非清洗焊剂,帮助修复电路板和保护电子元件。
- 它可用于印刷电路板,贴片和用于计算机和电话芯片焊接。
- 它是高品质的合金粉末和糊状树脂焊剂混合物,这样可避免残留物,所以你很容易清洗电路板。

- Help to repair the circuit boards and protect the electronic components. A necessary material for repairing the mobile phone mainboard
- The BAKU solder paste is a high viscosity no-clean flux, help to repair the circuit boards and protect the electronic components.
- It can be used for PCB, SMD and be used for soldering of computer and phone chips.
- It is the mixture of high-quality alloyed powder and resinous pasty flux, it can avoid the residue, so you are easy to clean the board

Net Soldering Flux
Lead Free Products
Lot#:125-06-1
Net:12g
Package : 1 x 12pcs

BK-6351 高级锡膏 BGA SOLDER PASTE



- 免清洗锡膏以及无卤化物。
- 印刷一致性的变化推动了第一轮印刷和回流焊收益最大化。
- 细微特征性能:高质量印刷和低量的变化降低到12密耳(0.30毫米)圆的特征尺寸。

- BAKU BK-6351 should be stored in a refrigerator upon receipt at 0-10°C (32 - 50°F). Permit paste to reach room temperature prior to opening. This will prevent Condensation of moisture on the solder paste.
- Print Consistency: Lower "deposit to deposit" variation drives maximisation of first pass print and reflow yields Fine Feature Capability: High print deposit volumes and low volume variability down to 12 mil (0.30mm) circle feature sizes.

Product: BK-6351
Alloy: 63Sn/37Pb,
Net: 33g
Package : 1 x 12pcs

BK-6352 高级无铅锡膏 LEAD-FREE SOLDER PASTE



-BK-6352 无铅锡膏以及无氯化物。
-宽回流温度曲线的窗口，对各种板子/元器件表面处理均有良好的可焊性。
-减少不规则锡珠水平，最大限度地减少返工和提高直通率。

-Halide-free material and Lead Free: Complies with RoHS
-Wide reflow profile window with good solder ability on various board / component finishes. Excellent solder and flux cosmetics after reflow soldering
-Reduction in random solder balling levels, minimizing rework and increasing first time yield Excellent pin-test yield for single and double reflow.

Alloys: SAC305 (96.5%Sn/3.0%Ag/0.5%Cu)
Powder Size: Type 4 (20-38µm)
Net: 16g
Package :1 x 12pcs

高级锡线 Superior Solder Wire



Diameter : 0.2mm-0.3mm-0.4mm-0.5mm-0.6mm-0.8mm-1.0mm
Weight : 100g
Diameter : 0.2mm-0.3mm-0.4mm-0.5mm-0.6mm-0.8mm-1.0mm
Weight : 200g
Diameter : 0.8mm-1.0mm-1.2mm
Weight : 500g
Diameter : 1.0mm-1.2mm
Weight : 1000g
Alloy : SN63/Pb37
RMA 1.9%
Package :100g x 30pcs, 200g x 15pcs

-Lead Free Solder utilizes a state-of-the-art automatic wire extrusion and wire drawing machines to manufacture consistent solder.
-The introduction of flux core in the wire extrusion process involves constant monitoring of flux percentage to ensure minimal flux voids and irregular wire.

BK-5500 高级精密清洁剂 Precision Cleaning Agent



-迅速清洗干净油污，油脂及其它顽固污渍。
-特别适用于清洗工模或其它金属表面上的防锈膏。
-完全发挥，不留痕迹，对金属表面无腐蚀。
-无毒，无恶劣刺激气味，对人体无害。

-Cleaning all stains,grease and other obstinate dirt quickly
-Specially apply for cleaning the antirust grease of the tool mould or other surface of metals.
-Volatilize completely,no residual,no corrosion to the surface of metals.
-No poison,no badly stimulate smell,harmless to body.
-Package :1 x 24pcs

BK-050G/051G 锡膏 BGA soldering paste



Alloy: Sn63/Pb37
Microns: 25-45µm
Net: 50g
Package :1 x 24pcs

-Halide-free materia
-Merit : Not contain harmful
-Application : Most of the cases of soldering operation, Soldering/Welding

BK-51 UV 胶 UV glue



原料 : 丙烯酸树脂
存储 : 温度10-30°C, 相对湿度≤70%
重量 : 50克
兼容 : 适用于智能手机屏幕

Main Raw Material : Acrylic
Storage : Temp 10-30°C, RH≤70%
Net : 50G
Package : 1 x 40pcs
Compatible with : All cellphone Screens

BK-625/225 助焊剂 Superior Flux



BK-625 助焊剂 Superior Flux
RMA R-625-Lo 30cc/12cc

-R型液体松香助焊剂
-Type R (Rosin): Non-activated rosin flux for soldering copper.

BK-225 助焊剂 Superior Flux
RMA-225-Lo 30cc/12cc
-RMA型液体松香助焊剂
-Type RMA (Rosin Mildly Activated): Mildly activated rosin flux that contains no chlorides .

Package :12cc x 25pcs ,30cc x 10pcs

Golden Molybdenum Wire



各种智能手机和平板电脑的液晶分离器机器使用。

Length: 100m/329ft
Thickness: 0.08mm
Package Included
1 x Gold Molybdenum Wire

-Replace & separate LCD & digitizer
-Easy to cut all kind of LCD assembly
-Professional Installation May Required

Advanced Enameled Wire



它可以用来连接飞线 (跳线) 电脑与手机主板维修。
无需拆卸直接焊接接漆。

Diameter : 0.09 mm , 0.15mm
Length : about 120cm
Package : 1 x 50pcs

-It can be used to connect Fly line(Jump wire) for computer & mobile phone motherboard repair .
-No need to remove the lacquer,welding directly.



烙铁头复活膏
可修复烙铁头,使烙铁头使用寿命更长。

-Net Weight :15g
-Package :1 x 12pcs

-Optimal tip temperature for refreshing it is from 300 to 360°C.
-Dip the hot tip into the tip refresher.
-Apply solder to the tip. Then carefully clean it with a moist sponge.

BK-402/403 Anti-static alcohol bottle



防静电酒精瓶有效避免液体挥发和溢出。

Plastic Type : Pvc
Surface Handling : Acid Etch
Sealing Type : Crown Cap
Capacity : 120/150ml
Package : 1 x 5pcs

-It can make u take out the liquid what you need, avoid volatilization and overflow.
-It can prevent the water u took out reflux in the bottle.
-It is used for use and clean of the electronic equipment, precision machine and soldering occasion.